


B747-400F

Loading specifications

Qantas Freight operates scheduled freighter services and charter operations using a Boeing 747-400F aircraft to supplement belly space capacity on key international routes.

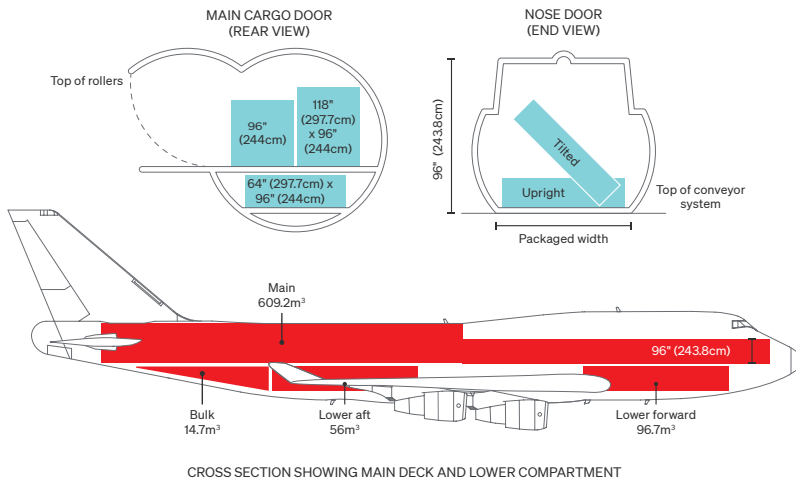

Boeing 747-400 Freighter

ULD Configuration	30M1/9LD7/2LD3/2PEB
Volume available for freight	813.62m ³
Maximum weight	110,000kg
Cargo door dimensions	
Main	122" (3.10m) x 134" (3.41m)
Main - nose loading	100" (2.54m) x 128" (3.25m)
Lower forward	67" (1.69m) x 105" (2.66m)
Lower aft	67" (1.69m) x 105" (2.66m)
Bulkhold	47" (1.20m) x 45" (1.12m)


32 pallet positions:
 30 positions - 96" (244cm) x 125" (318cm)
 2 PEB positions - 53" (135cm) x 88" (224cm)



Main deck volume

2 contoured pallets	96" (244cm) x 125" (318cm) x 96" (244cm)
5 pallets	96" (244cm) x 125" (318cm) x 96" (244cm)
23 contoured pallets	96" (244cm) x 125" (318cm) x 118" (299cm)
2 PEB pallets	53" (135cm) x 88" (224cm) x 84" (213cm)
Total volume = 607.70m ³	

20ft (PGA) type pallets are also available for outsized and oversized cargo

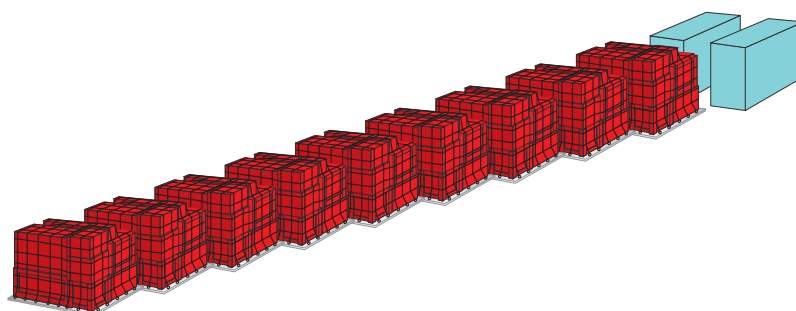

Lower hold volume

9 pallets	96" (244cm) x 125" (318cm) x 64" (162cm)
2 LD3/AKE ULDS	60.4" (153cm) x 61.5" (156cm)
Pallets total volume = 105.7m ³	
Bulkhold total volume = 14.7m ³	
LD1/AKE total volume = 9.9m ³	
Total volume = 130.3m ³	

The above configurations are provided as a guide only. Please confirm loading specifications at time of booking. Failure to do so may result in your shipment being delayed or offloaded.

For more information, contact your local freight sales office or email qffreighter@qantas.com.au

